

**PERTH SEAWATER DESALINATION PLANT**

**REPORTING IN ACCORDANCE WITH THE  
PERTH SEAWATER DESALINATION PLANT  
MARINE MONITORING AND MANAGEMENT PLAN**

**19<sup>th</sup> July 2011**



**Prepared by:**

**Kathy Blakeway  
Senior Engineer  
Contact No. 9410 5219, 0457 569 900  
kathy.blakeway@watercorporation.com.au**

## INTRODUCTION

In accordance with the Perth Seawater Desalination Plant's (PSDP) Marine Monitoring and Management Plan (MMMP), the Water Corporation submits this report to the Office of Environmental Protection Authority (OEPA) as per Section 7.

Near Sea Bed Loggers were deployed on the 29<sup>th</sup> April 2011 at two sites – North and South. At each site, dissolved oxygen sensors were placed at 0.2m and 0.5m above the seabed in order to establish whether any empirical relationships exist between dissolved oxygen saturation at the two depths.

The coordinates and plotted locations of the sites are provided in Figure 2 and Attachment 8 of the MMMP. Data will continue to be collected fortnightly for a minimum of 6 months.

Dissolved oxygen saturation data was collected at continuous 30 minute intervals between 17/6/11 to 13/7/11 and is provided in this report. Due to storm events occurring within this period, for occupational health and safety reasons data was unable to be downloaded until 13 July 2011.

## RESULTS

Dissolved oxygen saturation measured at 0.2m and 0.5m above the seabed at North and South NSDO sites are graphed in Appendix A and Appendix B respectively.

In summary, the difference in dissolved oxygen saturation recorded between the two depths is presented below:

**Table 1: Summary of NSDO Data 25/5/11 – 17/6/11**

	<b>Average Difference 0.5m – 0.2m</b>	<b>Maximum Difference</b>	<b>Time of Maximum Difference</b>
<b>North</b>	-0.03%*	4.5%	18/06/2011 15:00pm
<b>South</b>	0.99%	6.4%	23/06/2011 10:30am

\*Negative values represent DO% saturation being greater at 0.2m than 0.5m above seabed

## DISCUSSION

At North NSDO site, the dissolved oxygen saturation at 0.2m tracked within  $\pm 1\%$  of that measured at 0.5m for the majority of the time (Figure 1(b)). In approximately half the instances, the dissolved oxygen saturation was greater at 0.2m ASB than at 0.5m ASB. This is reflected in the calculated average difference in dissolved oxygen between the two depths of -0.03% (the negative value representing DO% saturation greater at 0.2m than 0.5m ASB).

At South NSDO site, the dissolved oxygen saturation at 0.5m was up to 2% higher than at 0.2m ASB for the majority of the time, with an average difference between the two depths of 0.99% (Figure 2(b)).

Comparing dissolved oxygen saturation between the two sites, both followed a similar trend with South site exhibiting more variation than North site.

## CONCLUSION

Over the period 17/6/2011 to 13/7/2011, dissolved oxygen measured at 0.2m and 0.5m above the seabed tracked closely at both sites, with an average difference of less than 1%. At North site, dissolved oxygen saturation was higher at 0.2m ASB for half the time. In comparison, dissolved oxygen saturation at South site was greater at 0.5m ASB for the majority of the time.

# APPENDIX A: NSDO North

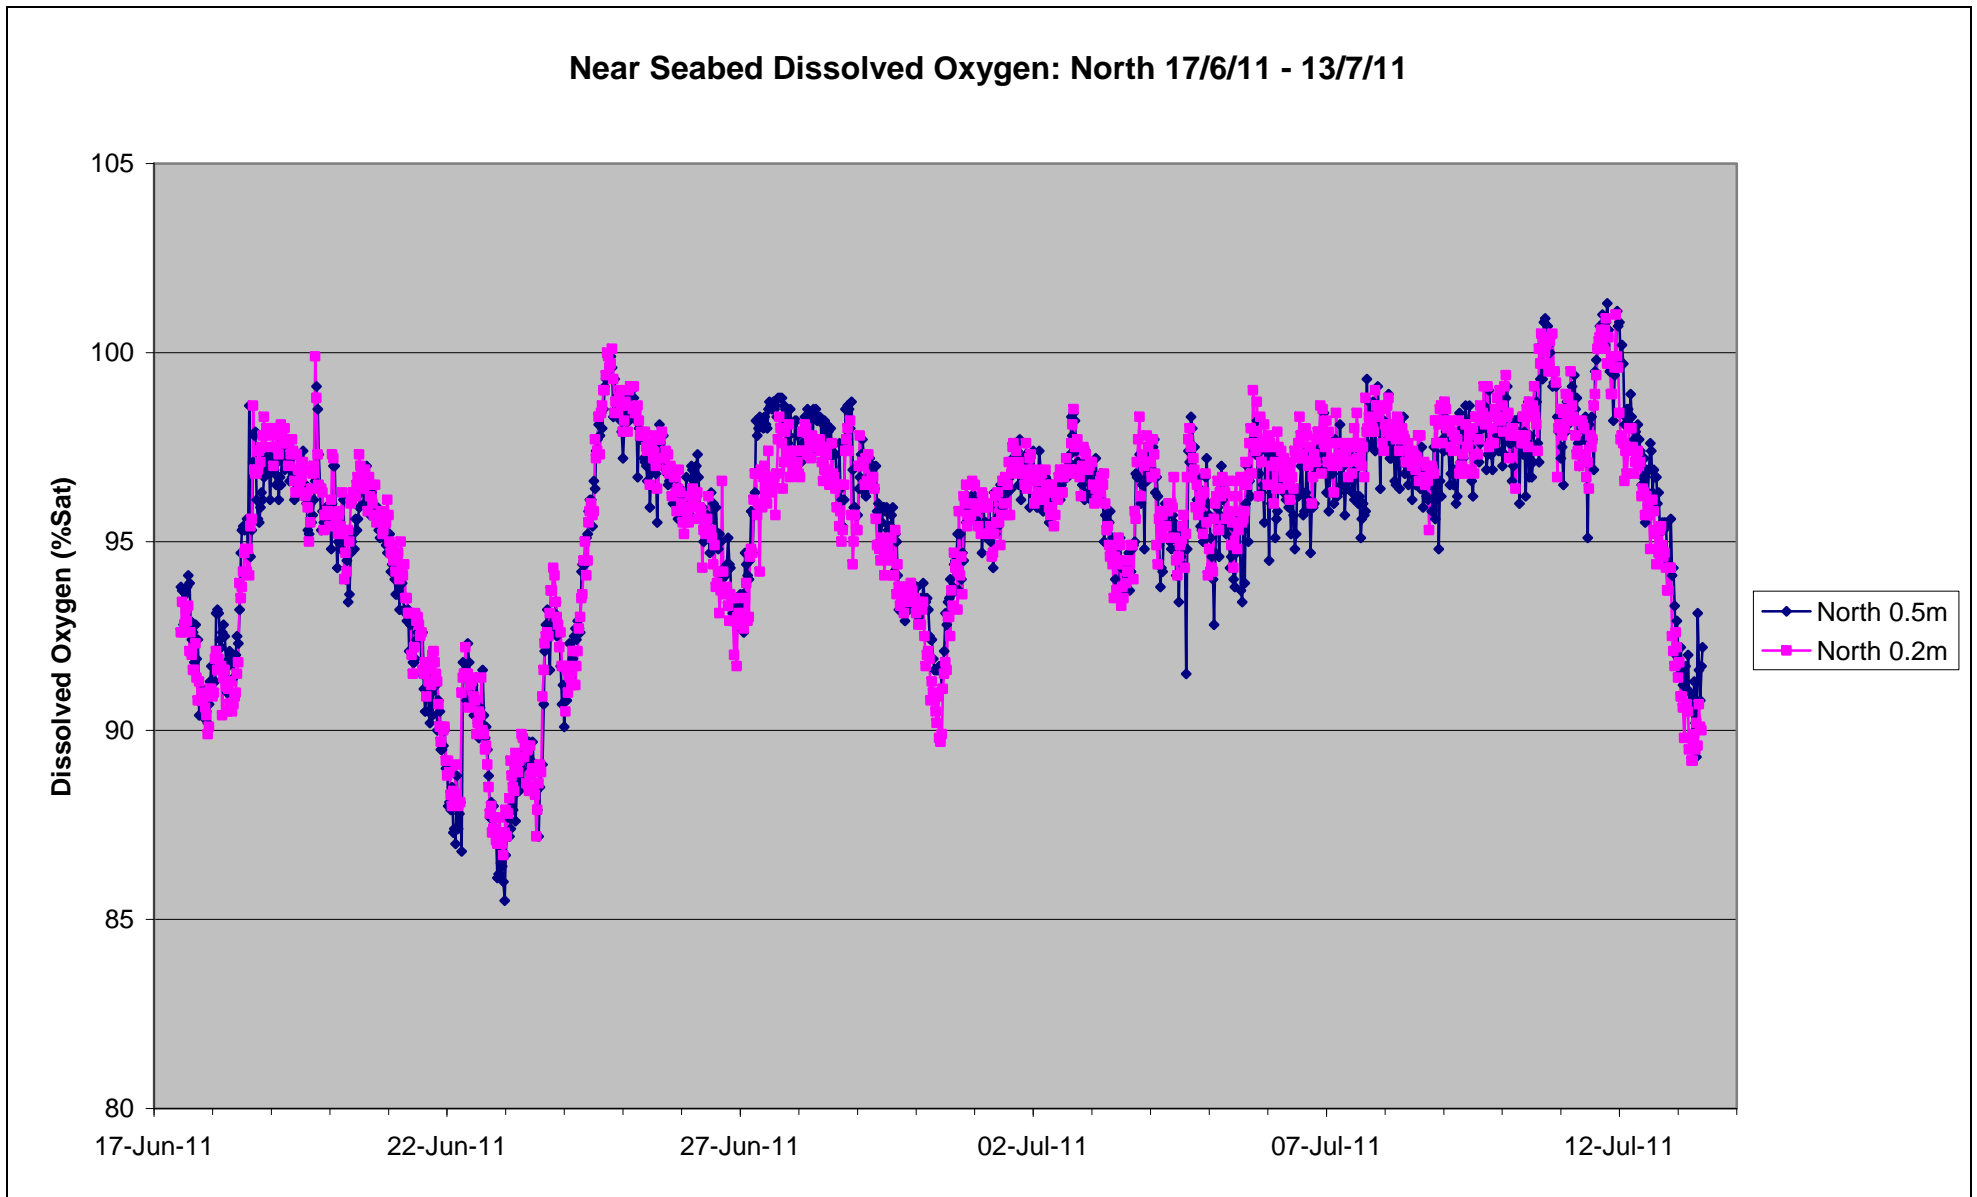
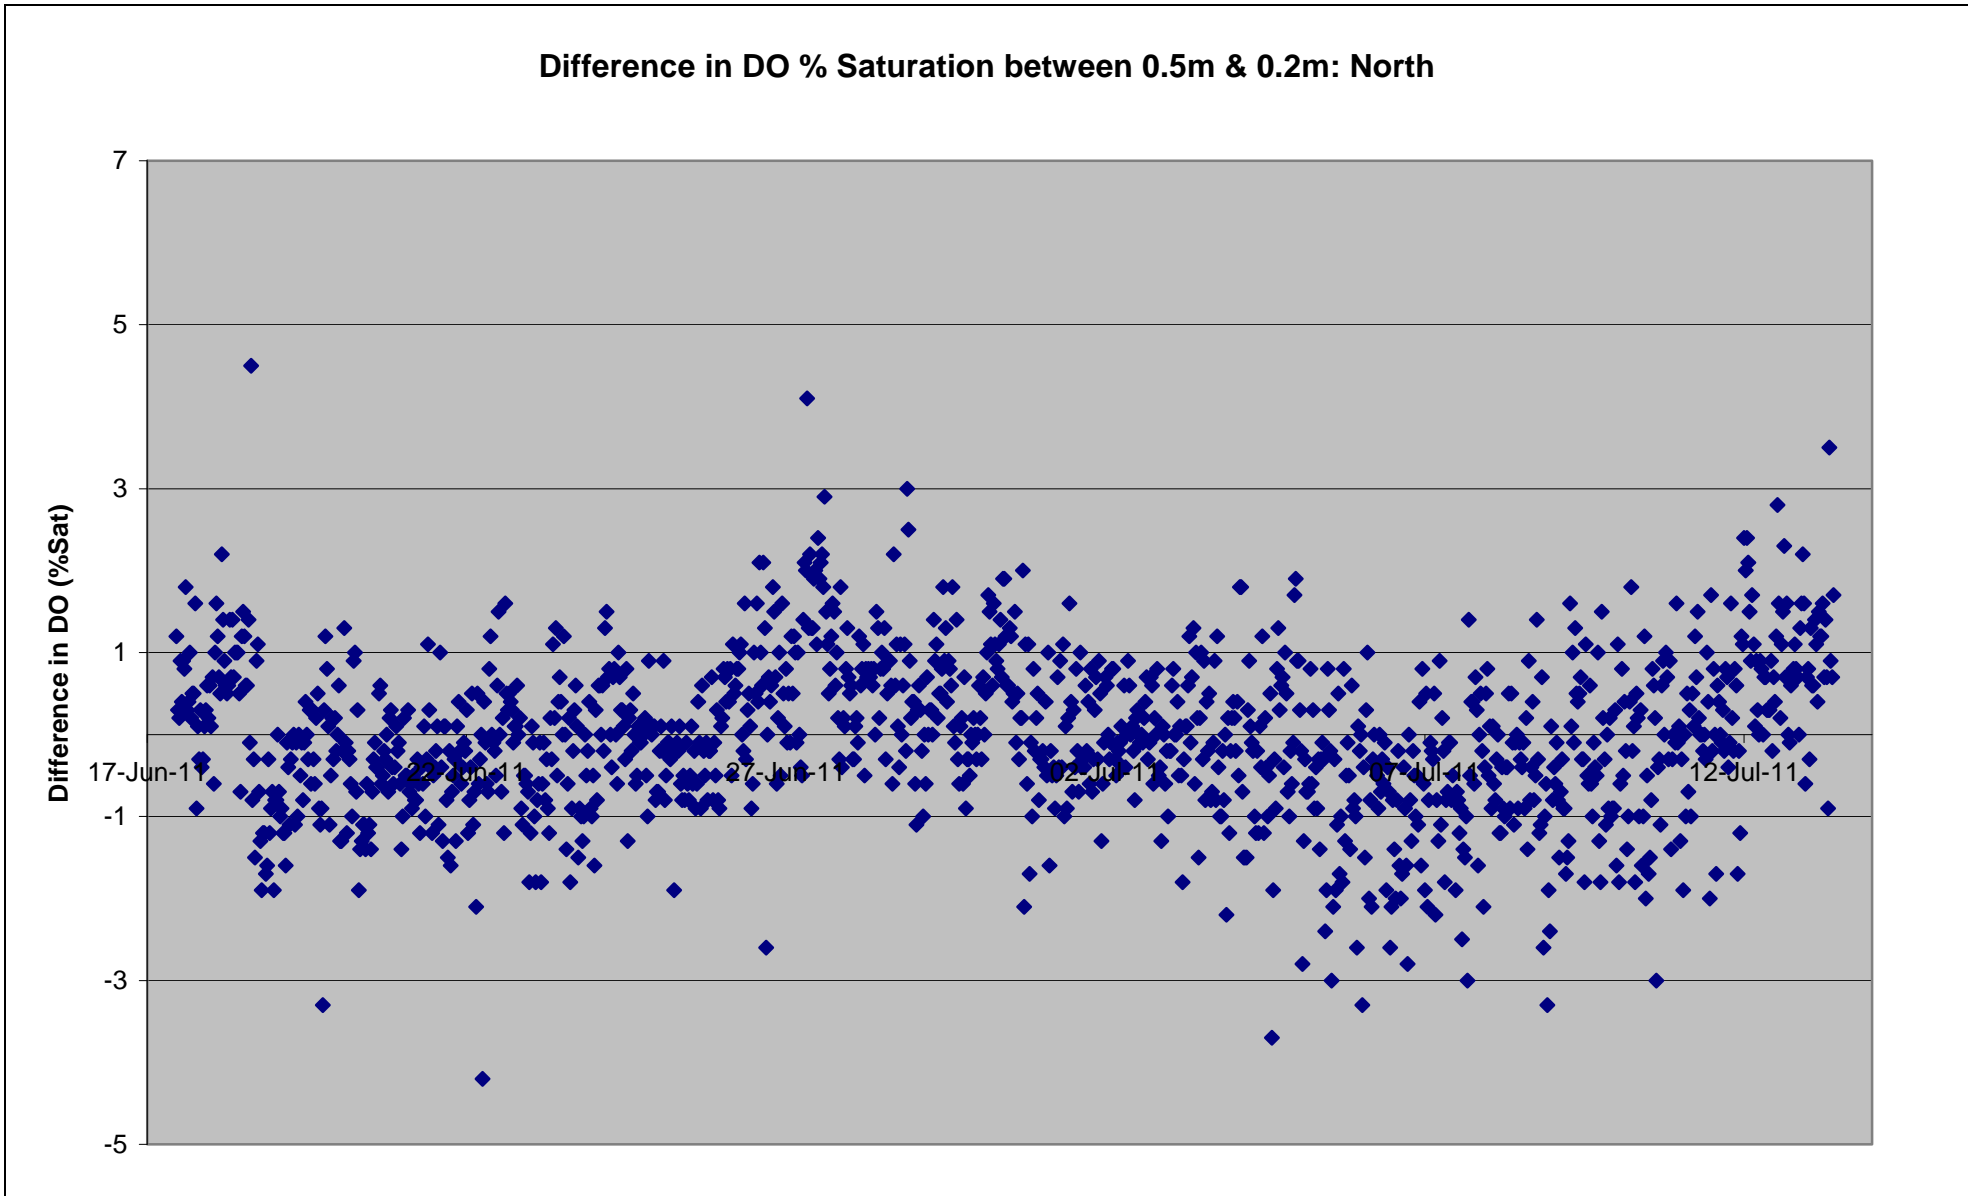


Figure 1(a): Near Seabed Dissolved Oxygen: North 17/6/11 – 13/7/11



**Figure 1(b):** Difference in Near Seabed Dissolved Oxygen at North Site (0.5m – 0.2m)

# APPENDIX B: NSDO South

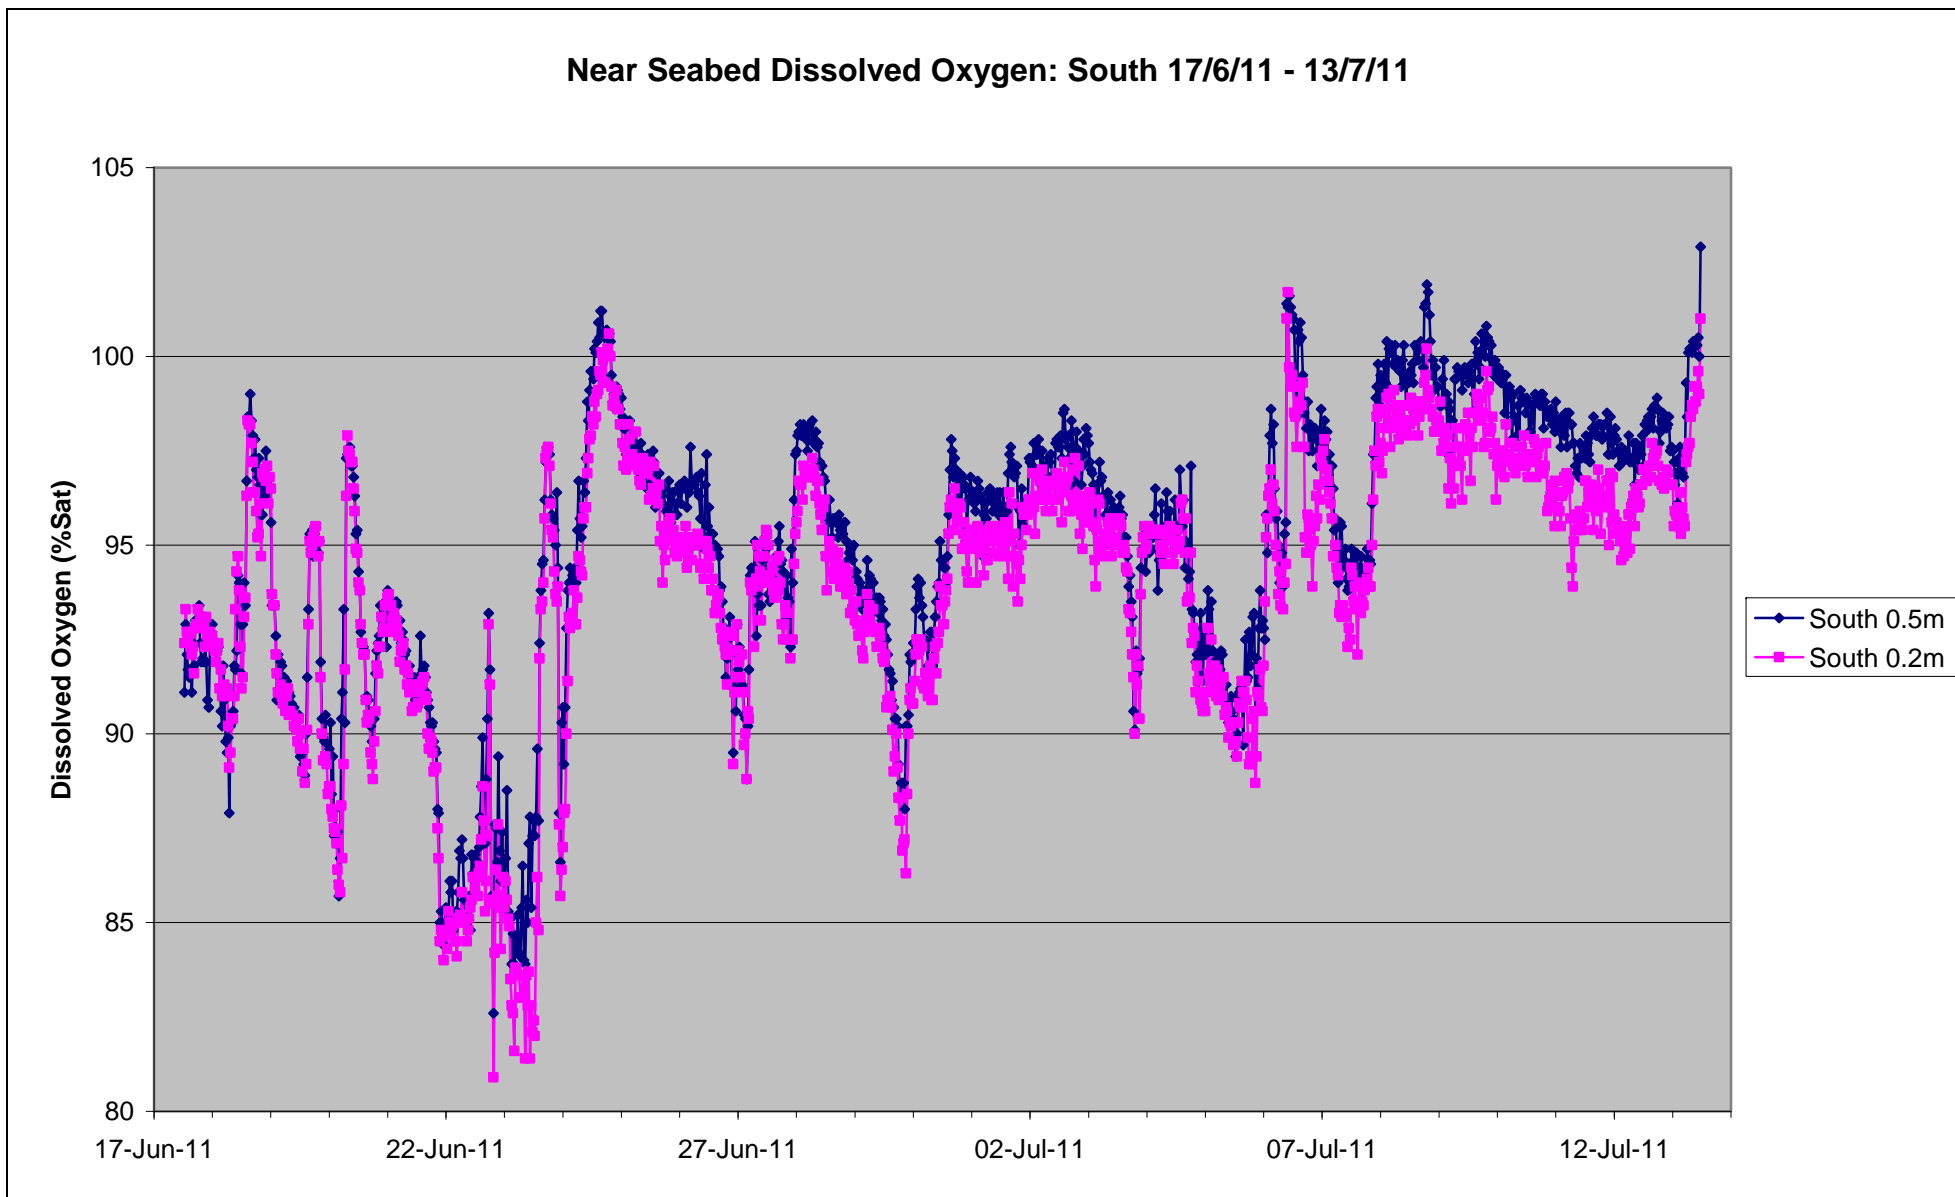


Figure 2(a): Near Seabed Dissolved Oxygen: South 17/6/11 – 13/7/11

### Difference in DO % Saturation between 0.5m & 0.2m: South

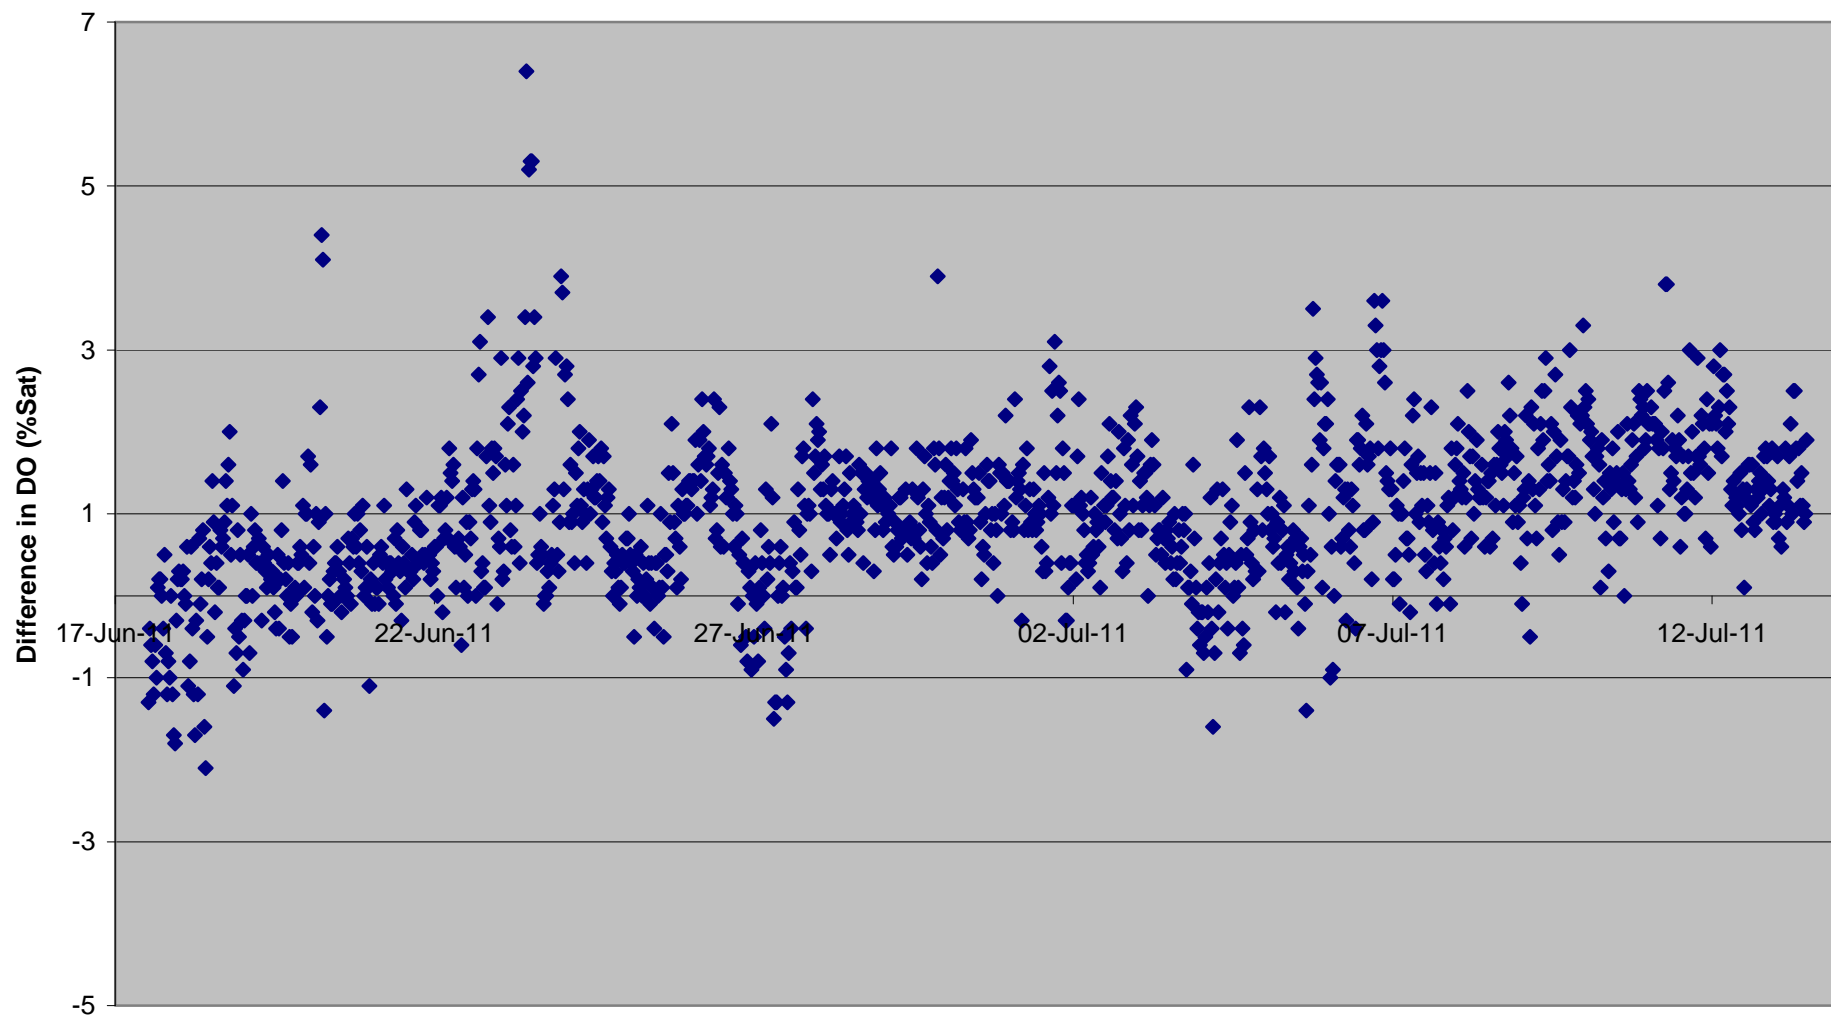


Figure 2(b): Difference in Near Seabed Dissolved Oxygen at South Site (0.5m – 0.2m)